



ETS – ANHOA

Since 2004

General cat. 2023 (EN)

SUPPORT EQUIPMENT

Designed by Viet Nam – Made by Viet Nam

Build The Value



An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN

Contact office: No.102 – A3 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN

Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088

Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn



Director's letter

Over view:

Since 2004, we are a Research – Manufacture - Trading Company. Our main products is Support Equipment for the fields of mechanical, electronic, LAB, technical training and other service industrials, ...
“Build The Value”, We always try our best to create real values for customers. We are proud to produce the pure Vietnamese support equipment, label An Hoa. Our products has many great advantages to compare with the imported products and high trusted whole Vietnam. We are also the distributor of the leading industrial labels from USA, EU, Japan, Korea, ...

Our target:

1. An Hoa products will be a reputable - pure Vietnamese label, comparable to the imported goods.
2. Promoting Green Production, supporting sustainable development, protecting the common environment.

Made by ETS – ANHOA products range:

1. Welding cabin use for mechanical workshop, technical training school, ...
2. Fume extractor for arc welding - cutting, plasma cutting, gas welding – cutting, ...
3. Soldering iron fume extractor.
4. Toxic fume extractor for industrial printing, electric board printing, ...
5. Air filter
6. Vacuum grinding machine
7. Welding electrode dryer, welding flux dryer
8. Auto rulo for water pipe, pneumatic pipe, electric cable, ...
9. CNC cutting machine, high capacity MMA welding machine
10. Other equipment: tools trolley, cylinder trolley, safety cabinet, working table, ...

Import products range:

1. Flammable gas arrestor for welding – cutting equipment and other flammable gas.
2. Plasma torch and spare parts.
3. Gas welding – cutting equipment
4. Measuring equipment
5. Spare parts for heating equipment.

Our commitment:

We commit supplying the high quality products, best solutions, professional after sales services and competitive prices.

Please do not hesitate to contact us for further information !

Best regards,

Nguyen Quy Tinh

(Mobile phone: +84.919536088)

Build The Value



An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dist. - Ha Noi City - VN

Contact office: No.102 – A3 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dist. - Ha Noi City - VN


Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088

Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn

PU HOSE – SPRING HOSE

PU Hose

High Quality – Any Length – Any Dia.

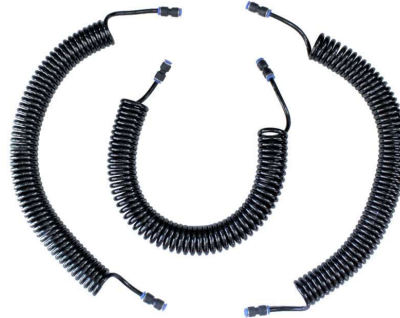

Applications:

- Painting robots, other robots and CNC center.
- Pneumatic tools for all assembly workshop.
- Motobike, car, vehicle maintenance services.
- Others pneumatic applications

Specifications:

- Diameter: 5x8, 6.5x10, 8x12, 12x16, ...
- Standard packing (Reel): 100kg, 200kg
- Length: 6m, 9m, 10m, 12m, 15m, 20m, 50m, 100m, ...
- Special shape (Twisted 2, 3, 4, 5, ...): Make to order
- Special spring diameter: Make to order
- Special length: Make to order
- Working pressure: 8 – 15 bar
- Testting pressure: 40 bar
- Working temperate: - 20°C ÷ 80°C
- Color: Red, blue, orange, yellow, white, black, ...



Advantages Of ETS – ANHOA Hose

1. High quality
2. Special length. special shape: Make to order, up to 100M
3. Fast delivery.
4. No minium order.

Made in Vietnam

Since 2004

Make to order

OEM - ODM Service

Contact us for further informations !

Build The Value



An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN

Contact office: No.102 – A3 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN

Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088

Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn

AIR AUTO RULO

Air Auto Rulo
High Quality – Any Length – Any Body Material



Applications:

- Pneumatic tools for repairing and assembly workshop.
- Motobike, car, vehicle maintenance services.
- Others pneumatic applications


Specifications:

- Diameter: 5x8, 6.5x10, 8x12, 12x16, ...
- Length: 6m, 9m, 10m, 12m, 15m, 20m, 50m, 100m, ...
- Close or open body
- Mild steel or stainless steel body: Make to order
- Special length: Make to order
- Working pressure: 8 – 20 bar
- Testting pressure: 40 bar
- Working temperate: - 20°C ÷ 80°C

(Available for the wall hook, stand, trolley, ... type)

Advantages Of ETS - ANHOA Air Auto Rulo:

1. High quality ! Air hose from USA, Germany, Japan, Korea, VN
2. Special length, special diameter: Make to order.
3. Fast delivery.
4. No minium order.

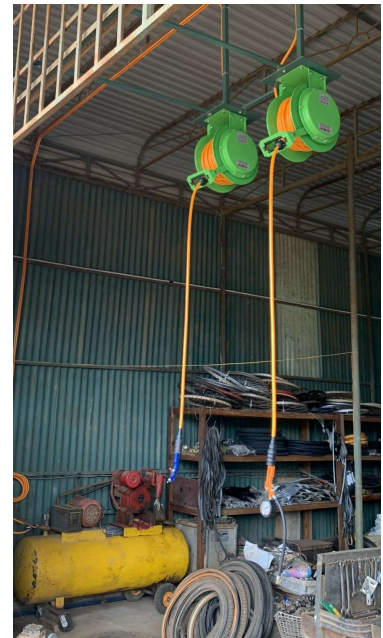

Main Specifications (Auto Rulo For The Automobile Garage) – Wall type

Model	AR6x10	AR6x15	AR6x20	AR8x10	AR8x15	AR8x20
Hose dia. (mm)	6.5x10			8x12		
Length (m)	10	15	20	10	15	20
Max working pressure (bar)	15					
Dimensions (mm)	W469xH320xT142			W469xH320xT142		
Weight (Kg)	5.8	6.5	7.5	6	6.8	7.8
Standard accessories	Quick connectors					

Made in Vietnam

Since 2004

Make to order

OEM - ODM Service

Contact us for further informations !

Build The Value



An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN
 Contact office: No.102 – A3 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN
 Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088
 Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn

WATER AUTO RULO

Water Auto Rulo

High Quality – Any Length – Any Body Material



Applications:

- Cleaning for the factory of chemical, milk, food , ...
- Cleaning for the pharmaceutical industry, medical, ...
- Cleaning for the kitchen, farm, ...
- Watering the garden, ...

Specifications:

- Diameter: 9.5x16, 13x21, 16x24, 19x27, 25x34, ...
- Length: 6m, 9m, 10m, 12m, 15m, 20m, 50m, 100m, ...
- Mild steel or stainless steel body: Make to order
- Special length: Make to order
- Working pressure: 8 – 180 bar (Make to order)
- Working temperate: - 20°C ÷ 80°C

(Available for the wall hook, stand, trolley, ... type)

Advantage Of ETS - ANHOA Water Auto Rulo:

1. Hose from USA, Germany, Japan, Korea.
2. Special length, special diameter: Make to order.
3. Fast delivery.
4. No minium order.



Main Specifications (Auto Rulo For The Family And Light Duty) – Stand type

Model	WR9.5x10	WR9.5x15	WR9.5x20
Hose dia. (mm)	9.5 x 16	9.5 x 16	9.5 x 16
Length (m)	10	10	10
Max working pressure (bar)	15	15	15
Dimensions (mm)	H400xW380xT188	H400xW380xT188	H400xW380xT188
Weight (Kg)	7.8	8.8	11.8
Standard accessories	Input connector (Water tap) / Multi-funtion nozzle)		

Made in Vietnam

Since 2004

Make to order

OEM - ODM Service

Contact us for further informations !

Build The Value



An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN

Contact office: No.102 – A3 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN

Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088

Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn

CABLE AUTO RULO

Electric Cable Rulo.

High Quality – Any Length – Any Body Material



Applications:

- Electric tools for repairing and assembly workshop.
- Motobike, car, vehicle maintenance services.
- Arc welding (Welding cable)
- Others applications

Specifications:

- Cable dia.: Standard and make to order
- Quantity of wire: Standard and make to order
- Cable length: Standard and make to order
- Mild steel or stainless steel body: Make to order
- Working temperate: - 20°C ÷ 80°C

(Available for the wall hook, stand, trolley, ... type)

Advantage Of ETS - ANHOA Cable Auto Rulo:

1. High quality !
2. Special spec (length, special diameter, ...): Make to order.
3. Fast delivery.
4. No minium order.



Main Specifications (Auto Rulo For The Family And Light Duty) – Stand type

Model	ER – 2Cx2.5x15	ER – 2Cx2.5x20	ER – 2Cx2.5x25
Cable spec.	2x2.5	2x2.5	2x2.5
Length (m)	15	20	25
Max power (V/A)	220/15	220/15	220/15
Dimensions (mm)	H400xW380xT167	H400xW380xT167	H400xW380xT167
Weight (Kg)	8.8	9.8	10.5
Standard Accessories	Input connector, Power socket (3 ports)		

Made in Vietnam

Since 2004

Make to order

OEM - ODM Service

Contact us for further informations !

Build The Value



An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN

Contact office: No.102 – A3 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN

Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088

Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn

VACUUM GRINDING MACHINE

Vacuum grinding machine
Protect health - Safe environment



Harm of grinding dust:

- Causes respiratory, skin and eye diseases for workers.
- Pollution of the environment.
- Adversely affecting product quality

How long is the replacement cycle of filters?

- Cotton filter: 02 – 03 months (Clean cotton filter monthly)
- Hepa filter: 18 – 24 months (Clean hepa filter monthly)

Applications:

- Manufacturing and repairing equipments:
- Medical equipment.
- Food equipment.
- Electronic equipment, semiconductor.

Multi Stages Filter's Main Informations:

1. Dust separation cyclone:

- Filters coarse dust

2. Filter Cotton (Pre – Filter):

- Filters large particle of dust, suspended particulates, bacterial viruses

3. Hepa filter (high efficiency particulate air filter):

- Filters over 70 kind of micro pollutants: suspended virus, bacteria, fungus, ...
- The filtering efficiency reaches 0.3µm / 99.97%

Advantages:

- Easy to take out grinding dust.
- Easy to clean, repair and replace the filter.
- Increase the life of the filter, reduce the number of periodic cleanings with cyclone.

Main Specifications For The Standard Model

Model	GRV-150	GRV-200	GRV-250	GRV-300
Supply voltage	1 phase - 220V - 50/60Hz / 3 phase – 380V – 50/60Hz			
Grinding power (W)	200	500	750	1.500
Vacuum power (W)	500	750	750	1.100
Disc dia. (mm)	150	200	250	300
No load speed (RPM)	2.800 – 3.250			1.420
Weight (Kg)	70	75	85	120
Standard equipment	Body: 01 / Centrifugal fan: 01 / Cyclone: 01 / Cotton filter: 01 / Hepa filter: 01			

Made in Vietnam

Since 2004

Make to order

OEM - ODM Service

Contact us for further informations !

Build The Value



An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN
 Contact office: No.102 – A3 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN
 Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088
 Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn

WELDING FUME EXTRACTOR

Moblinc Arc / Gas Welding Fume Extractor.
100% made in Vietnam



Harm of arc welding fume:

Arc welding fume is a mixture of metal oxides, silicates and fluorides. Welding fume particles have a very small size, in the welder's breathing zone is 0.2 - 0.5 microns. With this size, these molecules can easily penetrate and condense in the respiratory system. Over time these molecules may even be able to enter the bloodstream.

Arc welding fume (MMA, TIG, MIG, FCAW) often contains a very large amount of chromium, manganese, nickel and some other elements, which are very dangerous to health.

Diseases brought to workers if exposed to a lot of welding smoke:
Bronchitis, pneumonia, asthma, lung cancer, eye and skin diseases...

Applications:

- Arc welding workshop: MMA, MIG, TIG, ...
- Robotic welding, SAW welding
- Plasma cutting, oxy gas welding - cutting

How long is the replacement cycle of filters?

- Carbon filter: 03 - 06 months
- Hepa filter: 06 - 12 months (Clean hepa filter weekly)

Descriptions:

FEX (A) welding fume extractors are Standard mobile welding fume extraction system. These Mobile welding fume extractors are generally used for creating shop floor's environment safe & clean for workers. Welding Fume Extractors can be supplied separate at one site / multi site.

Multi Stages Filter's Main Informations:

1. Hepa filter (high efficiency particulate air filter):

- It filters over 70 kind of micro pollutants: suspended virus, bacteria, fungus, ...
- The filtering efficiency reaches 0.3µm / 99.97%

2. Active carbon filter:

- It effectively filter the common toxic and hazardous gases, formaldehyde, benzene

3. Option: Fire arrester and coarse dust by cyclone

Advantages:

- Easy to clean, repair and replace the filter.
- Increase the life of the filter, reduce the number of periodic cleanings with cyclone (Option)

Main Specifications For The Standard Model

Model	FEX.1200 (A)	FEX.1700 (A)
Supply voltage	1 phase - 220V - 50/60Hz	1 phase - 220V - 50/60Hz
Power (W)	750	1.100
Air flow (m3/h)	1.200	1.700
Noise (dB)	≤ 60	≤ 60
Weight (Kg)	45	55
Standard equipment	Body: 01 / Centrifugal fan: 01 / Hepa filter: 01 / Carbon filter: 01 / Flexible arm + Hopper: 01 / Option: Cyclone (Fire arrester and coarse dust)	

Made in Vietnam

Since 2004

12 months warranty

OEM - ODM Service

Contact us for further informations !

Build The Value



An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. - Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN
Contact office: No.102 - A3 - Alley 29 Lac Trung Str. - Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN
Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088
Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn

SOLDERING FUME EXTRACTOR

Mobile Soldering Welding Fume Extractor.
100% made in Vietnam



Harm of soldering fume:

Solder fume is a mixture of lead and other heavy metals. Welding smoke particles have a very small size, in the welder's breathing zone is 0.2 - 0.5 microns. With this size, these molecules can easily penetrate and condense in the respiratory system. Over time these molecules may even be able to enter the bloodstream. Soldering iron fume often contains a very large amount of lead, chromium, ... very dangerous to health. Diseases brought to workers if exposed to a lot of welding fumes: Poisoning, bronchitis, pneumonia, asthma, lung cancer, eye and skin diseases...

Applications:

- Electronic board welding
- Electric board printing
- Offset printing
- Other air filter applications

How long is the replacement cycle of filters?

- Cotton filter: 01 – 02 months (Clean cotton filter monthly)
- Carbon filter: 03 - 06 months
- Hepa filter: 06 - 12 months (Clean hepa filters monthly)

Multi Stages Filter's Main Informations:

1. Filter Cotton (Pre – Filter):

- It filters large particle of dust, suspended particulates, bacterial viruses

2. Pre - Hepa filter (high efficiency particulate air filter):

- It filters over 70 kind of micro pollutants: suspended virus, bacteria, fungus, ...
- The filtering efficiency reaches 0.3µm / 99.97%

3. Active carbon filter:

- It effectively filter the common toxic and hazardous gases, formaldehyde, benzene

4. Re - Hepa filter (It guarantees the perfect air cleanliness):

- Double Hepa filter can prevent the active carbon powder go out workshop.

Descriptions:

FEX (S) welding fume extractors are mobile welding fume extraction system. These Mobile welding fume extractors are generally used for creating shop floor's environment safe & clean for workers. Welding Fume Extractors can be supplied separate at a site / multi sites.

Main Specifications For The Standard Model

Model	FEX.260	FEX.360	FEX.500
Supply voltage	1 phase - 220V - 50/60Hz		
Power (W)	150	200	300
Air flow (m3/h)	260	360	500
Noise (dB)	≤ 60	≤ 60	≤ 60
Weight (Kg)	15	19	27
Standard accessories	Centrifugal fan: 01 / Cotton filter: 01 / Hepa filter: 02 / Carbon: 01 / Flexible hose + Hopper: 01		

Made in Vietnam

Since 2004

Make to order

OEM - ODM Service

Contact us for further informations !

Build The Value




An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. - Vinh Tuy Ward - Hai Ba Trung Dist. - Ha Noi City - VN
 Contact office: No.102 - A3 - Alley 29 Lac Trung Str. - Vinh Tuy Ward - Hai Ba Trung Dist. - Ha Noi City - VN
 Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088
 Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn

AIR PURIFIER

General use for office, laborator, classroom, restaurants, clothing shop ...
100% made in Vietnam

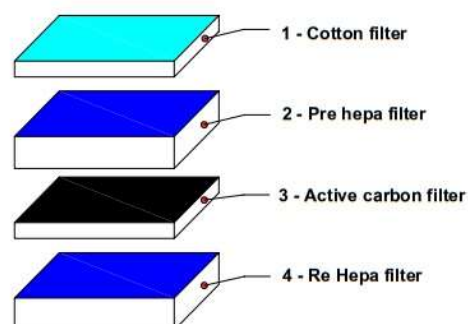

Applications:

- Creating enciroment clean, fresh
- Deodorize, remove fine particles and toxic fume.
- **Generally used for:** Office, laborator, classroom, restaurants, clothing shop ...

Multi Stages Filter's Main Informations:

1. Filter Cotton (Pre – Fillter):

- It filters large particle of dust, suspended particulates, bacterial viruses

2. Pre - Hepa filter (high efficiency particulate air filter):

- It filters over 70 kind of micro pollutants: suspended virus, bacteria, fungus, ...
- The filtering effeciency reaches 0.3µm / 99.97%

3. Active carbon filter:

- Deodorize, filter the common toxic and hazardous gases, formaldehyde, benzene

4. Re - Hepa filter (It guarantees the perfect air cleanliness):

- Dowble Hepa filter can prevent the active carbon powder go environment.

How long is the replacement cycle of filters?

- Cotton filter: 06 months (Clean cotton filter every 02 months)
- Carbon filter: 12 months
- Hepa filter: 36 months (Clean cotton filter every 06 months)

Main Specifications For The Standard Model

Model	AF.260	AF.360	AF. 500
Supply voltage	1 phase - 220V - 50/60Hz		
Power (W)	150W	200	300W
Air flow (M3/h)	260	360	580
Noise (dB)	≤ 45	≤ 45	≤ 63
Weight (Kg)	15	19	24
Use for room (m2)	30	50	100
Standard accessories	Centrifugal fan: 01 / Cotton filter: 01 / Hepa filter: 02 / Carbon filter: 01		

Made in Vietnam

Since 2004

Make to order

OEM - ODM Service

Contact us for further informations !

Build The Value



An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN
Contact office: No.102 – A3 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN
Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088
Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn

ELECTRODE DRYER

Electrode Dryer (Light Duty)
Stainless Steel Inside – Digital Display – Timer



Applications and main descriptions:

Best choice for drying welding electrode, drying tools and sample in laboratory.
Powder painted mild steel cover - Stainless steel drying chamber.
Pre-eminent in keeping temperate due to quality rock wool.

Equipped with: Heating bar; digital display temperate controller, timer.
- Annealing programming: Option

Drying – Annealing Procedure: Option

- * Step 1: Temp. will be increased up to drying value without timer.
- * Step 2: Maintain the drying temp. at seted timer.
- * Step 3: Finish step 2, temp. will be down to seted annealing temp.
- * Step 4: Maintain the annealing temp. up to power off

Advantage of ETS - ANHOA Electrode Dryer:

1. Modul design:

The main working parts (Heating box, control box, main body) is modul designed, very easy to be installed or uninstalled and therefore YOU can do repairing, maintenance and replacing by your self following a very simple technical guide.

Minimized the transport cost to send replaced parts if inquired, Minimized the repairing time.

2. Timer: Automatic stop drying at any inquiry time.

Main Specifications For The Light Duty

Model	DR50-3.0	DR50-3.5	DR50-4.0	DR.100-3.0	DR100-3.5	DR100-4.0	DR100-5.0
Input voltage	1 phase 220V AC (50-60HZ)						
Power (kw)	2.0	2.5	3.0	3.0	3.5	4.0	4.5
Max capacity (kg)	50			100			
Max temp. (°C)	50 - 300	50 - 350	50 - 400	50 - 300	50 - 350	50 - 400	50 - 500
Adjust step (°C)	1			1			
Drying tray number	2			3			
Max rod length (mm)	≤ 450						
Drying Chamber (mm)	W450xH350x350			W450xH450x350			
Weight (kg)	~ 45			~ 55			

Main Specifications For The Heavy Duty

Model	DR.200-3.5	DR200-4.0	DR300-3.5	DR300-4.0	DR400- 3.5	DR400-4.0
Input voltage	1 phase 220V AC			3 phases 380V AC		
Power (kw)	3.5	4.5	8.5	10.0	10.0	12.5
Max capacity (kg)	200	200	300	300	400	400
Max temp. (°C)	50 - 350	50 - 400	50 - 350	50 - 400	50 - 350	50 - 400
Adjust step (°C)	1					
Drying tray number	4		6		8	8
Max rod length (mm)	450 - 550					
Drying Chamber (mm)	W550xD400xH650		W550xD450xH750		W650xD450xH850	
Weight (kg)	~ 105		~ 125			

Made in Vietnam

Since 2004

Make to order

OEM - ODM Service

Contact us for further informations !

Build The Value



An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN
Contact office: No.102 – A3 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN
Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088
Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn

FLUX DRYER

Flux Dryer – Top loading
Stainless Steel Inside – Digital Display – Timer



Applications and main descriptions:

Best choice for drying welding flux.
Powder painted mild steel cover.
Stainless steel drying chamber.
Pre-eminent in keeping temperate due to quality rock wool.

Equipped with:

- Heating bar.
- Digital display temperate controller.
- Time switch

Time switch setting:

- * Red key: Drying on.
- * White key: Drying off.
- * Timer: On / Off daily programming

Advantage of ETS - ANHOA Flux Dryer:

1. Modul design:

The main working parts (Heating box, control box, main body) is modul designed, very easy to be installed or uninstalled and therefore YOU can do repairing, maintenance and replacing by your self following a very simple technical guide.

Minimized the transport cost to send replaced parts if inquired, Minimized the repairing time.

2. Small flux loading door: Easy for loading welding flux.

3. On / Off daily Program: On / Off daily programming by red / white keys

Main Specifications For The Standard Flux Dryer

Model	FDR.100-4.0	FDR.200-4.0	FDR.300-4.0	FDR.400-4.0	FDR.500-4.0
Input voltage	1 phase 220V AC (50-60HZ)		3 phases 380V AC (50-60HZ)		
Power (kw)	3.5	5.0	8.5	10.0	12.0
Max capacity (kg)	100	200	300	400	500
Max temp. (°C)	50 - 400	50 - 400	50 - 400	50 - 400	50 - 400
Adjust step (°C)	1	1	1	1	1
Drying Chamber (mm)	500x500xH500	500x500xH700	650x650xH900	700x700xH950	800x800xH950
Weight (kg)	~ 95	~ 115	~ 135	~ 175	~ 225

Made in Vietnam

Since 2004

Make to order

OEM - ODM Service

Contact us for further informations !

Build The Value



An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. - Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN
Contact office: No.102 - A3 - Alley 29 Lac Trung Str. - Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN
Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088
Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn

FLUX DRYER C/W AUTO ANNEALING MODE

Flux Dryer – Top loading
Stainless Steel Inside – Digital Display – Timer



Applications and main descriptions:

Best choice for drying welding flux.
Powder painted mild steel cover.
Stainless steel drying chamber.
Pre-eminent in keeping temperate due to quality rock wool.

Equipped with:

- Heating bar.
- Digital display temperate controller.
- Digital timer

Drying – Annealing Procedure:

- * Step 1: Temp. will be increased up to drying value without timer.
- * Step 2: Maintain the drying temp. at seted timer.
- * Step 3: Finish step 2, temp. will be down to seted annealing temp.
- * Step 4: Maintain the annealing temp. up to power off

Advantage of ETS - ANHOA Flux Dryer:

1. Modul design:

The main working parts (Heating box, control box, main body) is modul designed, very easy to be installed or uninstalled and therefore YOU can do repairing, maintenance and replacing by your self following a very simple technical guide.

Minimized the transport cost to send replaced parts if inquired, Minimized the repairing time.

2. Small flux loading door: Easy for loading welding flux.

3. Annealing Program: Available. Detail as Drying – Annealing procedure above.

Main Specifications For The Auto Annealing Flux Dryer

Model	FDR.100-4.0	FDR.200-4.0	FDR.300-4.0	FDR.400-4.0	FDR.500-4.0
Input voltage	1 phase 220V AC (50-60HZ)		3 phases 380V AC (50-60HZ)		
Power (kw)	3.5	5.0	8.5	10.0	12.0
Max capacity (kg)	100	200	300	400	500
Max temp. (°C)	50 - 400	50 - 400	50 - 400	50 - 400	50 - 400
Adjust step (°C)	1	1	1	1	1
Drying Chamber (mm)	500x500xH500	500x500xH700	650x650xH900	700x700xH950	800x800xH950
Weight (kg)	~ 95	~ 115	~ 135	~ 175	~ 225

Made in Vietnam

Since 2004

Make to order

OEM - ODM Service

Contact us for further informations !

Build The Value



An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN

Contact office: No.102 – A3 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dict. - Ha Noi City - VN

Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088

Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn

PORTABLE DRYER

Portable Electrode Dryer
Stainless Steel Inside – Light weight



Applications and advantages:

Best choice for electrode drying on site.
Powder painted mild steel cover.
Stainless steel inside.
Light weight
Options: Temperature adjustment / Temperature digital display

Main Specifications For The Standard Flux Dryer

Model	DR5-2.0	DR10-2.0	DR10-3.0
Input voltage	1 phase / 220V / 50-60 Hz		
Power (kw)	0.3	0.5	0.6
Max drying capacity (kg)	5	10	10
Max temperature (°C)	200	200	300
Rod length (mm)	≤ 450		
Inside dim. (mm)	90x90xH(L)450	110x110xH (L)450	
Weight (kg)	6.5	7.5	

Drying Accessories
Suitable for all heating equipment



Latches



Hinges



Solid



Tem. controller



K sensor



PT100 sensor



Heating bar

Made in Vietnam

Since 2004

Make to order

OEM - ODM Service

Contact us for further informations !

Build The Value



An Hoa Equipment And Technological Solutions Co., Ltd

Main office: No.501 - A6 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dist. - Ha Noi City - VN
Contact office: No.102 – A3 - Alley 29 Lac Trung Str. – Vinh Tuy Ward - Hai Ba Trung Dist. - Ha Noi City - VN
Tel: (84) 24. 36367574 / 36367576 Hotline: (84)919536088
Email: sales.khomay@gmail.com Web: www.ets-anhoa.com / www.khomayviet.vn